


QA Technology is always striving to offer you the best tip selection to ensure reliable contact for any target type challenge you may experience. As technology in board manufacturing advances, we work closely with our customers to design the best possible tip style for their intended applications where contact problems sometimes may arise.

We are pleased to add two new Serrated tip styles in a variety of conventional and X Probe[®] Socketless Series products: **49 and B9**.

The new **49 and B9 Serrated** tip designs are for contacting pasted pads with dome or bead shaped solder, leads or terminals/posts. As with all our serrated tip styles, they are configured with multiple points of contact to distribute the force over a greater area resulting in optimum coverage.

The .025" [.64mm] diameter is a headless addition to our family of serrated tips offering a consistent size over various center-to-center spacing to choose from.

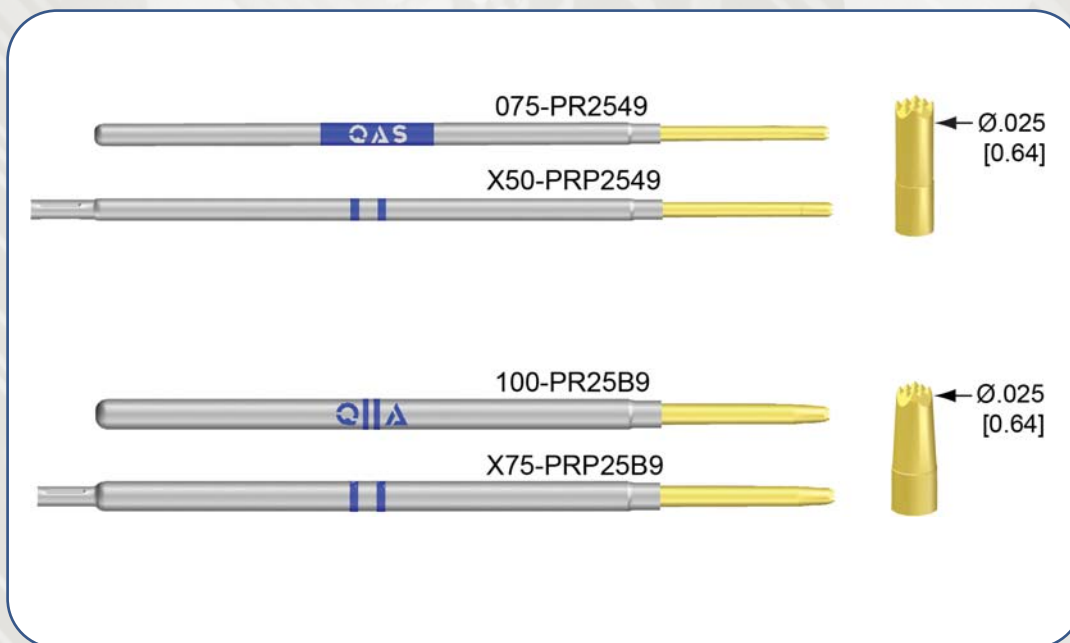

All dimensions are in inches [mm]. All spring forces are in ounces [gms].